

BG-4KCH

4K UHD/1080P FHD USB-C Video Capture Device/Box with Scaler

User Manual







TABLE OF CONTENTS

| | |
|-----------------------------------|----|
| Statement | 4 |
| Safety Precaution | 4 |
| Introduction | 5 |
| Features | 5 |
| Packing List | 5 |
| Technical Specifications | 6 |
| Operation Controls and Functions | 7 |
| Video Streaming | 7 |
| Stream and record videos with OBS | 11 |
| Troubleshooting | 14 |
| Usb Pin Definition | 15 |
| Tech Support | 16 |
| Warranty | 16 |
| Mission Statement | 16 |
| Copyright | 16 |



Statement

Please read these instructions carefully before connecting, operating, or configuring this product. Please save this manual for future reference.

Safety Precaution

- To prevent damaging this product, avoid heavy pressure, strong vibration, or immersion during transportation, storage, and installation.
- The housing of this product is made of organic materials. Do not expose to any liquid, gas, or solids which may corrode the shell.
- Do not expose the product to rain or moisture.
- To prevent the risk of electric shock, do not open the case. Installation and maintenance should only be carried out by qualified technicians.
- Do not use the product beyond the specified temperature, humidity, or power supply specifications.
- This product does not contain parts that can be maintained or repaired by users. Damage caused by dismantling the product without authorization from BZBGear is not covered under the warranty policy.
- Installation and use of this product must strictly comply with local electrical safety standards.
- Disconnect power cord by connector only. Do not pull on cable portion.
- Do not place or drop heavy or sharp-edged objects on power cord. A damaged cord can cause fire or electrical shock hazards. Regularly check power cord for excessive wear or damage to avoid possible fire / electrical hazards.
- Ensure unit is always properly grounded to prevent electrical shock hazard.
- Do not operate unit in hazardous or potentially explosive atmospheres. Doing so could result in fire, explosion, or other dangerous results.
- Handle with care to avoid shocks in transit. Shocks may cause malfunction. When you need to transport the unit, use the original packing materials, or alternate adequate packing.
- Turn off the unit if an abnormality or malfunction occurs. Disconnect everything before moving the unit.

Note: due to constant efforts to improve products and product features, specifications may change without notice.



Introduction

The BG-4KCH USB-C 4K Video Capture Box with Scaler provides a simple, reliable way to capture HDMI video signals. Users can instantly capture HDMI signals from devices like PTZ cameras, video game consoles, or PC's for broadcast to streaming services including YouTube, Twitch, and Facebook. The utilization of large volume image buffer technology prevents video tearing, allowing for optimal image reproduction. Compact and portable, the BG-4KCH is an ideal fit for a video technicians toolkit, as well as anyone needing a discreet capture device.

Features

- HDMI video and audio streams over USB 3.1 Type-C Gen 1
- Supports UVC1.0/1.1/1.5
- Supports video resolution up to 4K2K@30
- Supports deinterlace & scaler*
- Auto-detection on video format to ensure plug-play operations
- Recording Video Format: Software Compression
- Works on multiple operating system platforms (Windows 7/8.1/10, Mac and Linux OS)
- Compatible with most 3rd party software including YouTube, Twitch, Facebook, OBS Studio, and Zoom
- Supports USB 3.1 Gen 1 (RGB/YUY2/NV12) (capture up to 4K2K@30) and USB 2.0 (YUY2/NV12) (capture up to 720P@30)
- Low Latency (3~4ms at 1080P)
- System Requirements (Recommended)
 - Windows® 7(SP1) / Windows 8.1 / Windows 10
 - PC: Intel® Core™ i5-4440 3.10GHz + NVIDIA® GeForce® GTX 660 or higher
 - Laptop: Intel® Core i7-4810MQ + NVIDIA GeForce GTX 870M or higher
 - 4GB RAM or higher

* Scale-up feature supports up to 1080P@60

Packing List

- 1 x BG-4KCH
- 1x User Manual
- 1 x USB 3.0 A to C Cable (host to device)
- 1x Quick Start Guide




Technical Specifications

| Technical | | |
|---|---|---|
| Role of usage | Video Capture Device | |
| Input Video bandwidth | 297MHz | |
| Output bandwidth | Up to 350Mbps (USB-C) | |
| Video support (USB-C) | Up to 4K2K@30 | |
| Audio Input | HDMI Embedded Audio | |
| Audio Format | 2CH 16bit PCM | |
| Recording Mode | Software Compression | |
| Recording Video Format | RGB/YUY2/NV12 (USB3.1 Gen 1), YUY2/NV12 (USB2.0) | |
| ESD protection | Human body model: ±15kV (air-gap discharge) & ±8kV (contact discharge) | |
| PCB stack-up | 4-layer board (impedance control — differential 100Ω; single 50Ω) | |
| Firmware update | Feasible via USB-C Port | |
| Input | 1x HDMI | |
| Output | 1x USB-C | |
| HDMI connector | Type A [19-pin female] | |
| USB connector | USB 3.1 Type C (SuperSpeed USB) | |
| Software compatibility (not complete list) | OBS Studio (Windows, Linux, MAC), Potplayer (Windows), VLC (MAC, Linux), AMCap (Windows), XSplit Boardcast (Windows), Skype (Windows, MAC), Zoom (Windows), Hangout (Windows), TeamViewer (Windows) | |
| OS Support | Windows 7 /8.1 /10, Mac and Linux OS | |
| Mechanical | | |
| Housing | Metal enclosure | |
| Dimensions (L x W x H) | Model | 3" x 1.5" x 0.7" [77 x 38 x 19mm] |
| | Package | 6.4" x 4.4" x 1.7" [165 x 111 x 42mm] |
| | Carton | 1'6" x 1'4" x 13.8" [490 x 426 x 352mm] |
| Weight | Model | 2 oz [58g] |
| | Package | 5 oz [142g] |
| Power supply | Via USB-C | |
| Power consumption | 3 Watts (max) | |
| Operation temperature | 32~104°F / 0~40°C | |
| Storage temperature | -4~140°F / -20~60°C | |
| Relative humidity | 20~90% RH (no condensation) | |



Operation Controls and Functions

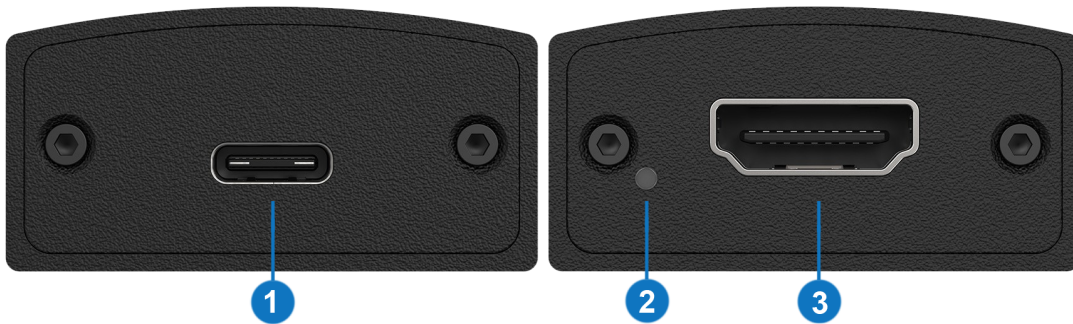

1. **USB-C OUT:** Connect to a USB host (PC, NB, MAC...)
2. **LED INDICATOR:** Power & input signal indicator LED
 - [Blue] Device power on
 - [Green] Input detects HDMI signal
 - [Red]* Input source is HDCP protected
3. **HDMI IN:** Connect to an HDMI source

*When the input source is HDCP protected, LED will become red to indicate the content is legally encrypted and can NOT be captured.


Video Streaming

Create a Video Stream

Users can create video streams on their streaming service platform of choice. The below steps show how to complete the video streaming settings from Twitch and YouTube.

Twitch


1. Browse the Twitch website (<https://www.twitch.tv/>) and log in, then select "**Creator Dashboard**" from your account drop-down menu at the top right of the screen.

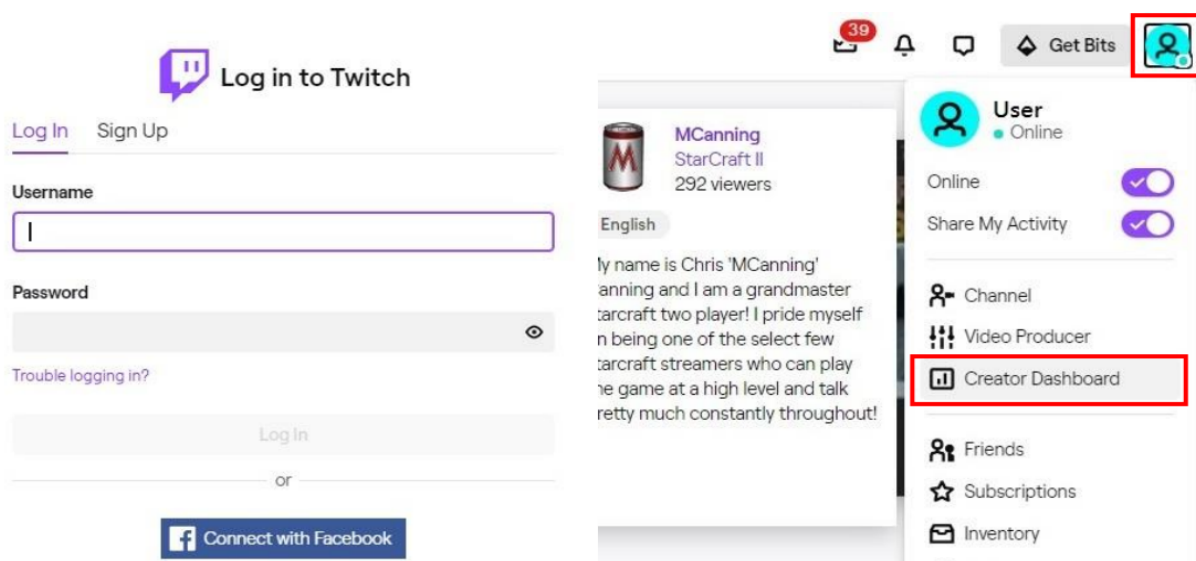




- Find "**Preferences**" in the left menu, and click "**Channel**", then you will see "**Primary Steam key**" on the screen. Copy the "**Primary Steam key**" and paste it into the "**Stream Key**" field in the OBS, then click "**Start Streaming**" in the software.


* Please refer to steps 4-6 of the OBS software control program.

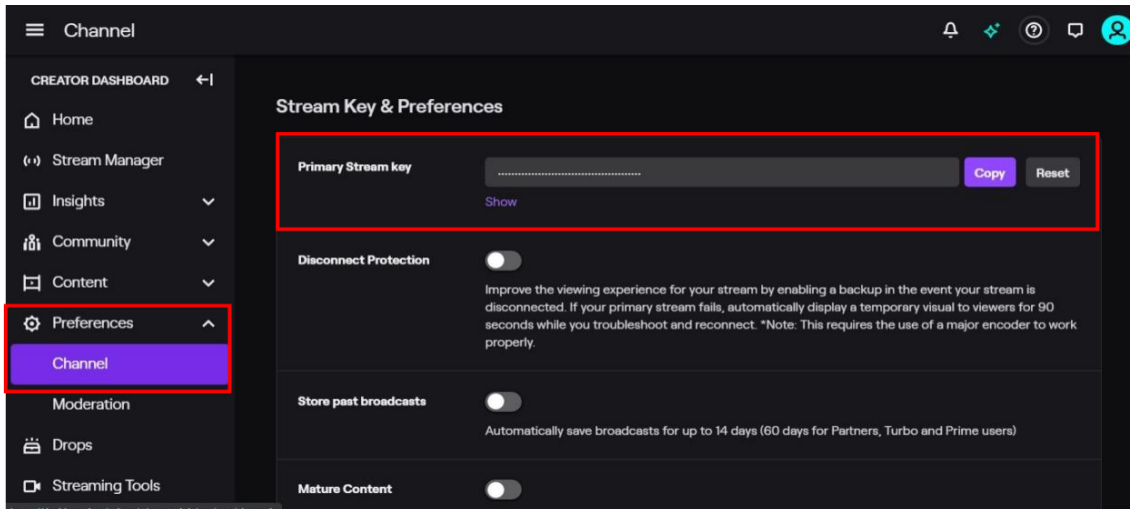

- Go back to Twitch and select "**Channel**" from your account drop-down menu.

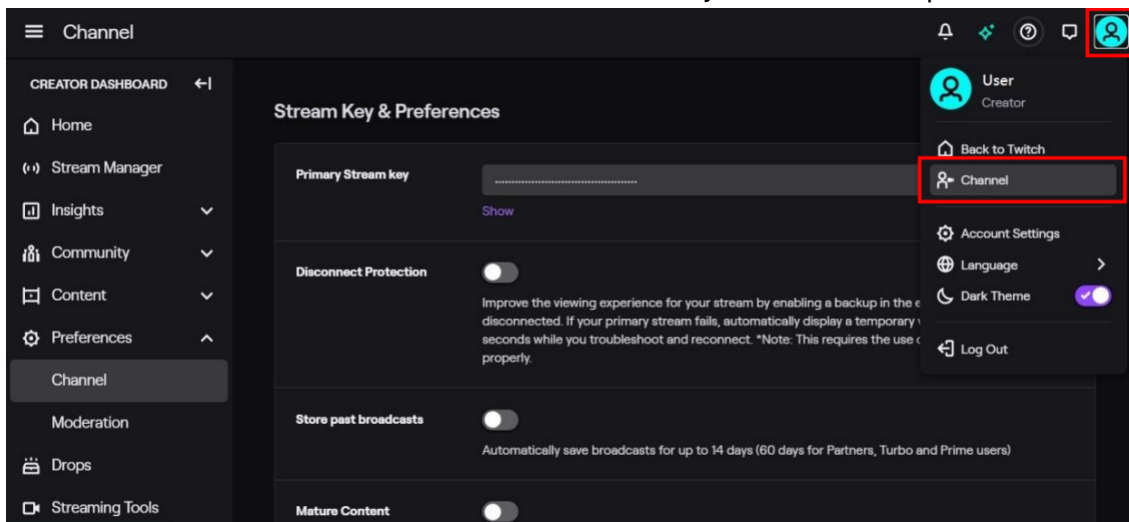

- At this point, you will see the player start live streaming.

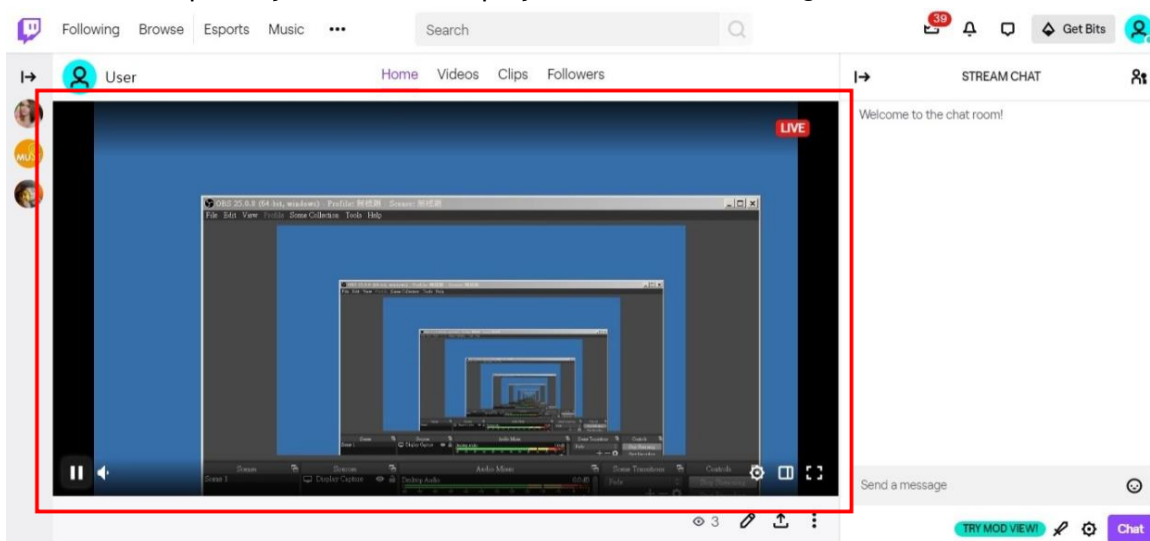





YouTube

1. Browse the YouTube website (<https://www.youtube.com/>) and log in, then click "**Go live**" from the "**Create**" icon menu at the top right of the screen.

* If your account is using YouTube for the first time to create a video stream, you need to wait 24 hours to enable the function.

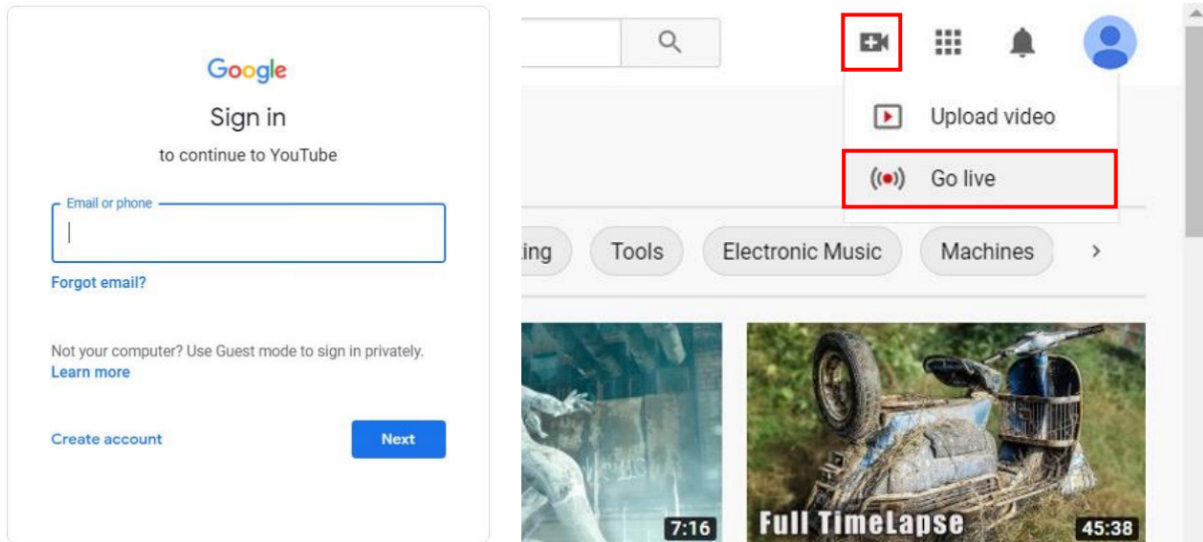


2. Click "**Stream**" in the left menu, and fill in the relevant information of the live video to create a new stream.

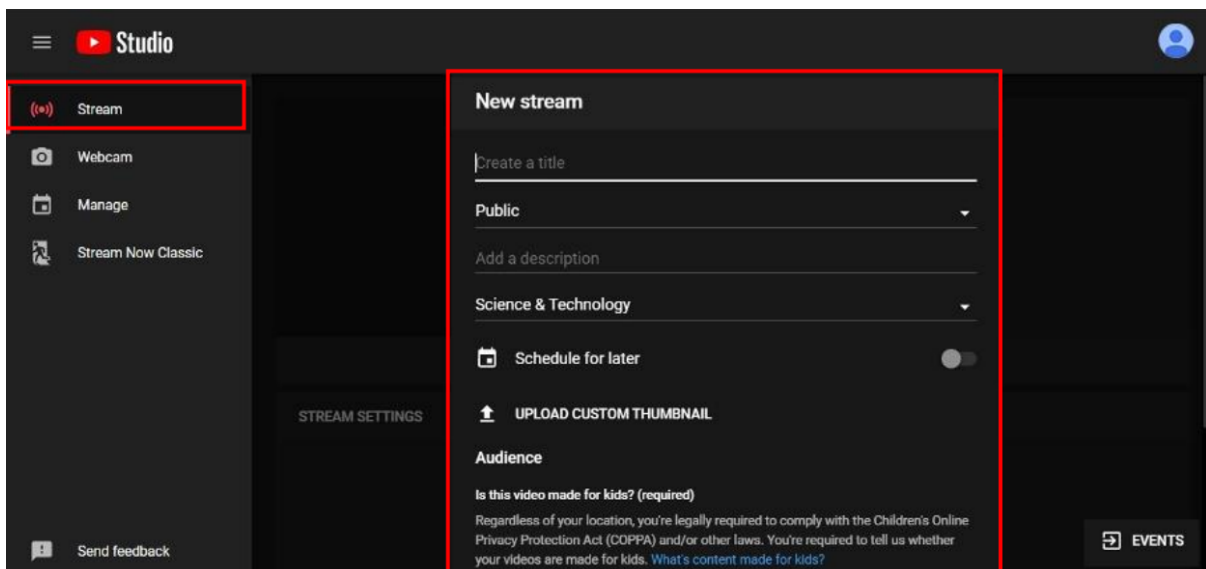


3. You will see "**Stream key**" from the "**STREAM SETTINGS**" below. Copy the "**Stream key**" and paste it into the "**Stream Key**" field in the OBS, then click "**Start Streaming**" in the software.


* Please refer to steps 4-6 of the OBS software control program.

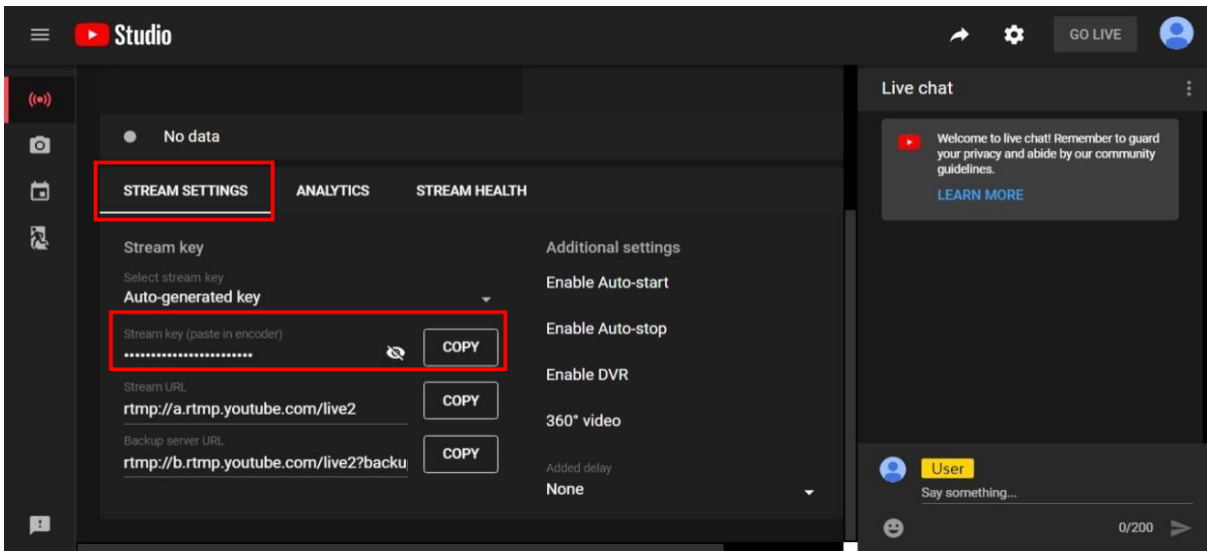

- Next, go back to YouTube, and then wait for 30-60 seconds, the player will display the live preview. At the same time, the "GO LIVE" button at the top right will turn blue, please press this button.

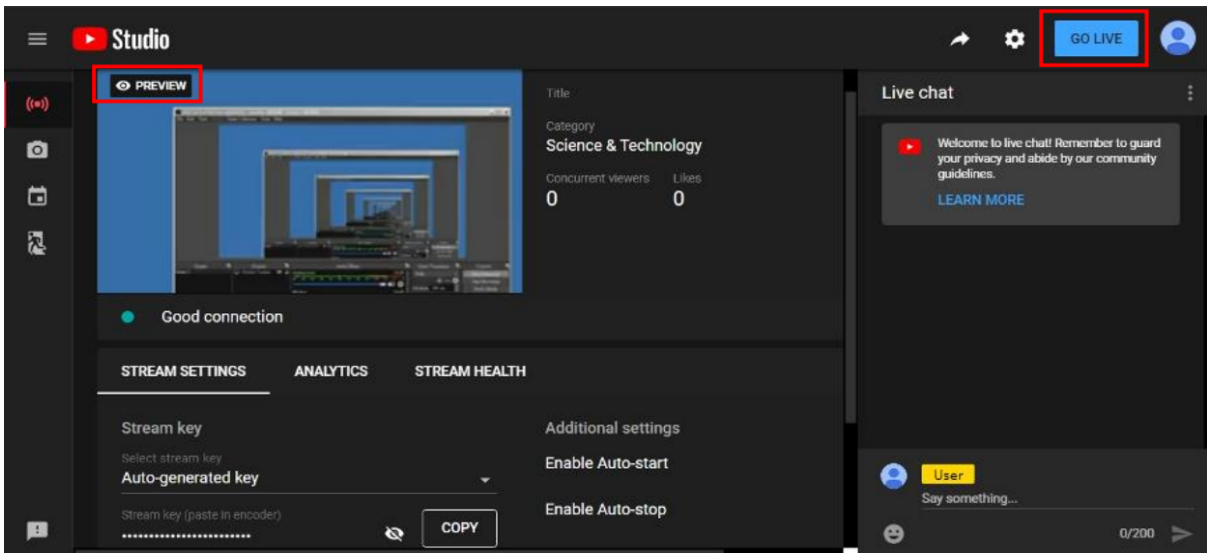

- The player on YouTube will start live streaming.

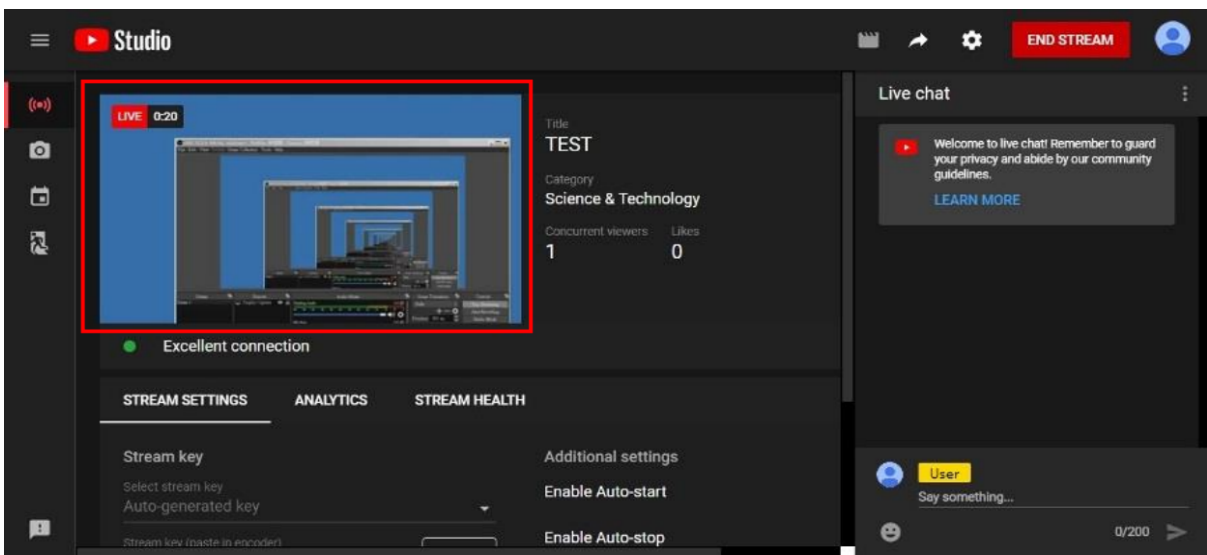



Stream and record videos with OBS

OBS is a popular USB capture freeware and has excellent compatibility. Please start with OBS if users are not familiar with USB capture devices.


Download the software

Browse the download page of the OBS official website (<https://obsproject.com/download>), then select the suitable computer operating system and start downloading.




Start the software control program

After downloading the software, please open it and follow the below steps to complete the video streaming settings.

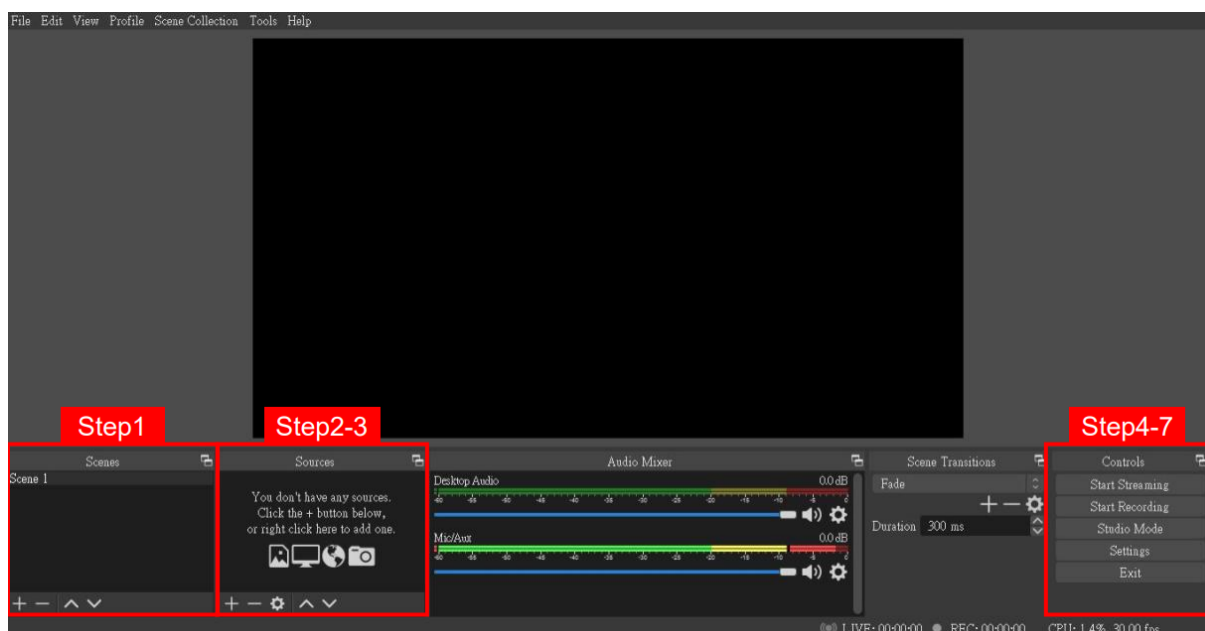





1. First, find the "Scenes" window, click "+" in the lower left corner, and then enter the name of the scene to create a new scene.

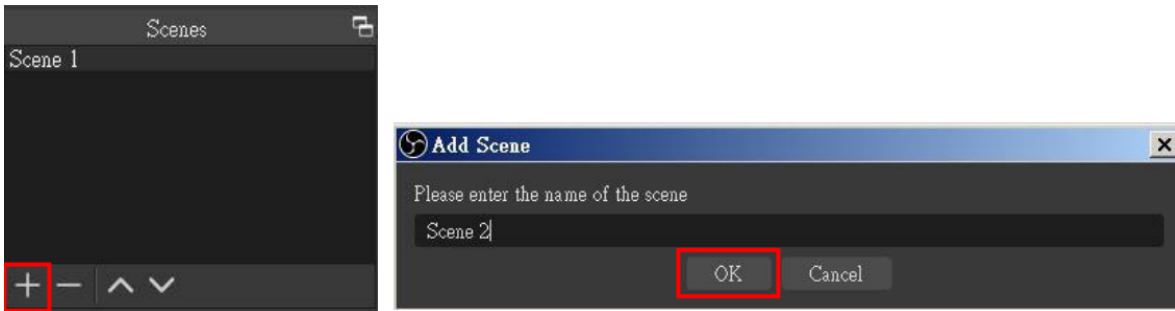

2. Find the "Source" window, click "+" in the lower left corner, and then select "Display Capture" or "Video Capture Device" to create a new source.

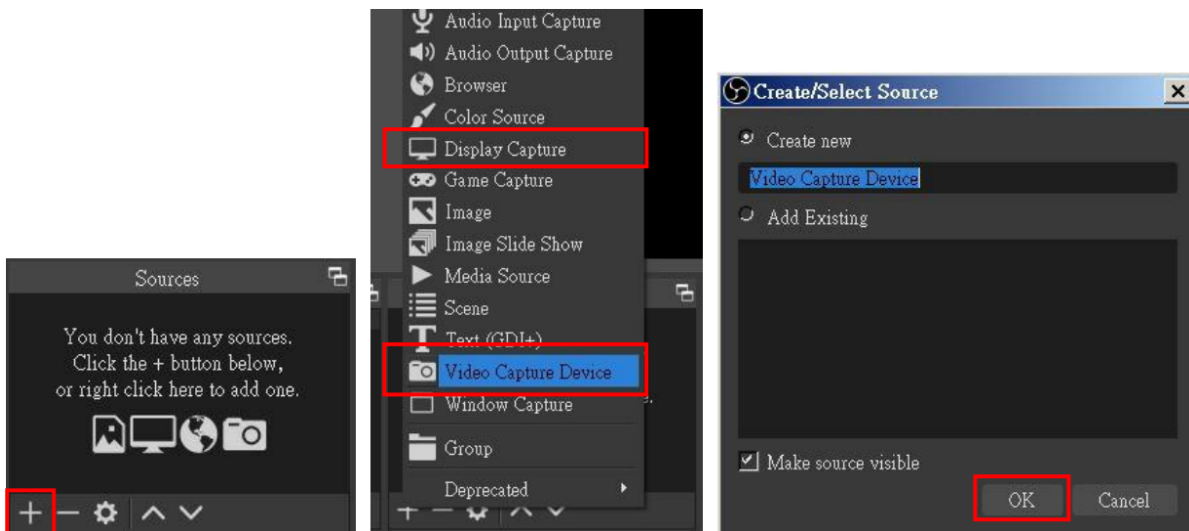


3. Next, you can set display capture properties. If you select "Display Capture" in step 2, you can select the primary monitor or other extended monitor as the display source. If you select "Video Capture Device" in step 2, you can select USB video device as the display source. After all settings are completed, click "OK".

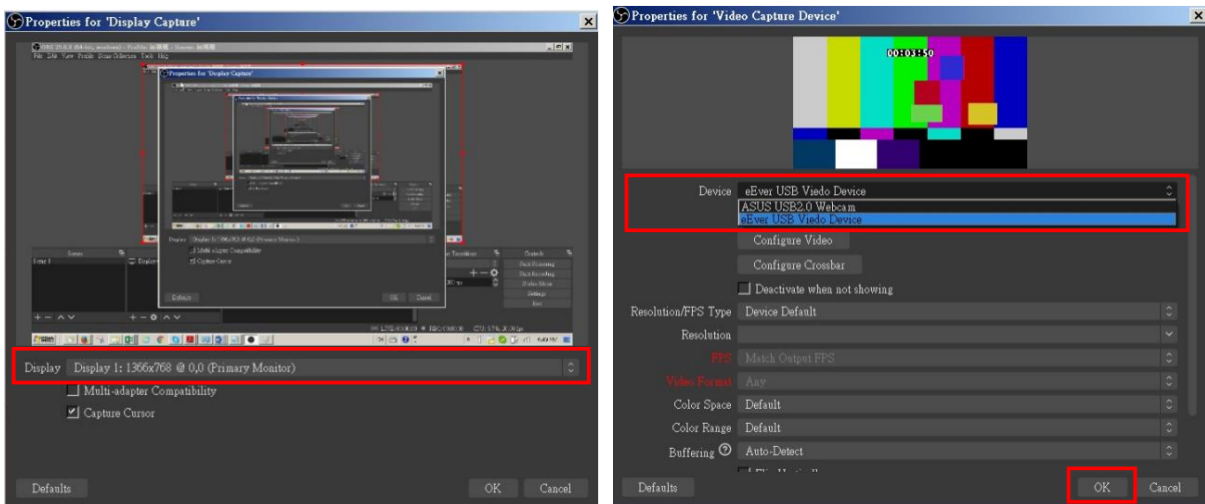




- Click "**Settings**" and then select "**Stream**" to perform streaming settings. Users can choose service providers, including Twitch, YouTube, etc.

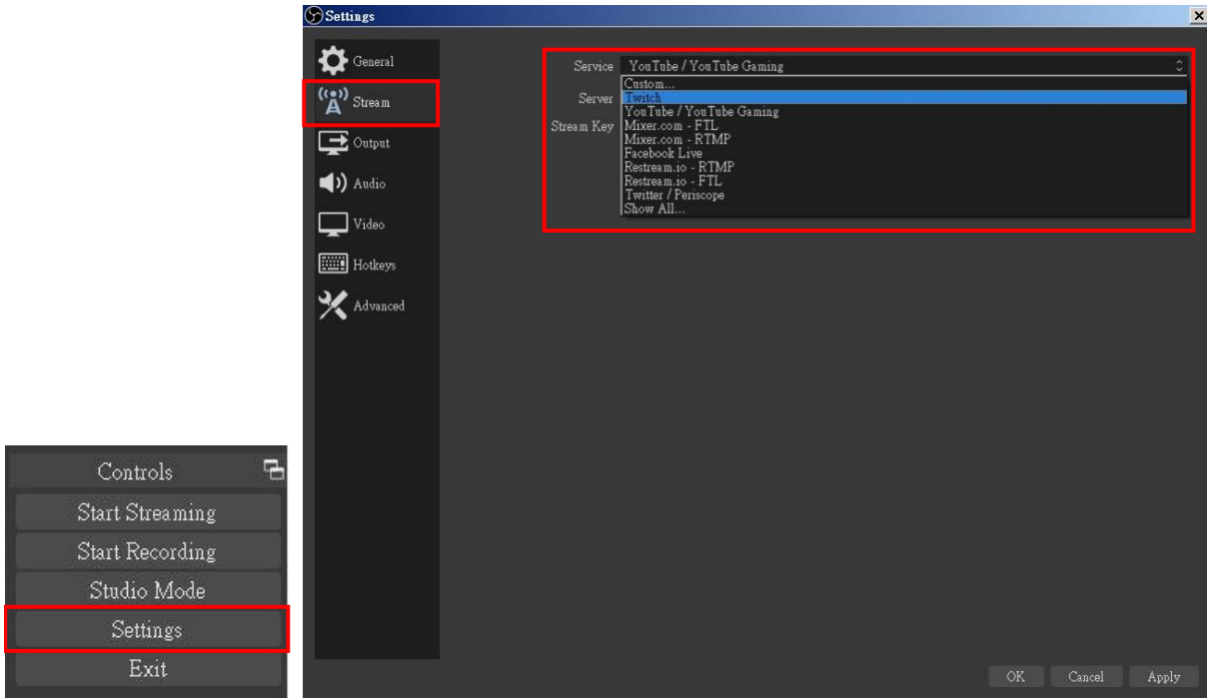


- Paste the stream key provided by the service provider into the "**Stream Key**" field, then click "**Apply**" and "**OK**" after setting. In addition, users can click "**Get Stream Key**" at this step to open the service provider website.



- Please click "**Start Streaming**". At this time, the screen after clicking "**Start Streaming**" will be displayed in the live video.



- On the other hand, users can also click "**Start Recording**" to record videos with OBS. Besides, you can click "**Settings**" and then select "**Output**" to set "**Recording Path**" and "**Recording Format**".

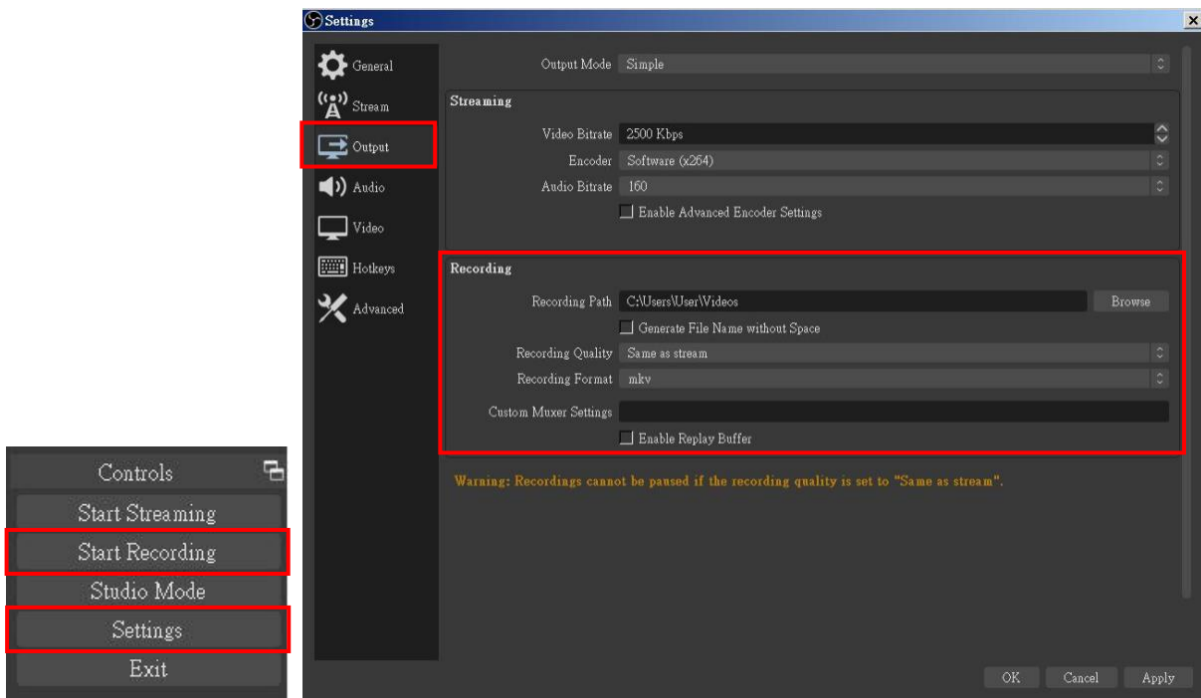

Note: The procedures the manual demonstrates are based on the interface that each website provides at the time when the manual is written. The most current method of live streaming should be similar to the above procedures but is subject to change by the website interface update by the social media platform.

Troubleshooting

1. The BG-4KCH supports HDCP to protect legal content from copyright infringement. If an HDMI input is equipped with HDCP protection, the status LED will turn red to indicate the presence of HDCP. No capture will be legally allowed if HDCP is detected. Please use non-HDCP protected HDMI sources or disable HDCP in order to enable content capture. Check connected device for an option to disable HDCP.
2. Due to the complexities of OS and computer hardware, different USB ports on your PC or laptop may have different performance or limitations. If the device does not work on one USB connection it still may work on another.
3. If video quality is low or the video connection is intermittent, try another HDMI cable.



Usb Pin Definition



| | P1 | | P2 |
|--------|-------|---|-------|
| VBUS | 1 | ↔ | 1 |
| D- | 2 | ↔ | 2 |
| D+ | 3 | ↔ | 3 |
| GND | 4 | ↔ | 4 |
| SSRX- | 5 | ↔ | 5 |
| SSRX+ | 6 | ↔ | 6 |
| GND | 7 | ↔ | 7 |
| SSTX- | 8 | ↔ | 8 |
| SSRX+ | 9 | ↔ | 9 |
| Shield | SHELL | ↔ | SHELL |



Tech Support

Have technical questions? We may have answered them already!

Please visit BZBGear's support page (bzbgear.com/support) for helpful information and tips regarding our products. Here you will find our Knowledge Base (bzbgear.com/knowledge-base) with detailed tutorials, quick start guides, and step-by-step troubleshooting instructions. Or explore our YouTube channel, BZB TV (youtube.com/c/BZBTVchannel), for help setting up, configuring, and other helpful how-to videos about our gear.

Need more in-depth support? Connect with one of our technical specialists directly:

| <u>Phone</u> | <u>Email</u> | <u>Live Chat</u> |
|----------------|--|--|
| 1.888.499.9906 | support@bzbgear.com | bzbgear.com |

Warranty

BZBGear Pro AV products and cameras come with a three-year warranty. An extended two-year warranty is available for our cameras upon registration for a total of five years.

For complete warranty information, please visit bzbgear.com/warranty.

For questions, please call 1.888.499.9906 or email support@bzbgear.com.

Mission Statement

BZBGear is a breakthrough manufacturer of high-quality, innovative audiovisual equipment ranging from AVoIP, professional broadcasting, conferencing, home theater, to live streaming solutions. We pride ourselves on unparalleled customer support and services. Our team offers system design consultation, and highly reviewed technical support for all the products in our catalog. BZBGear delivers quality products designed with users in mind.

Copyright

All the contents in this manual and its copyright are owned by BZBGear. No one is allowed to imitate, copy, or translate this manual without BZBGear's permission. This manual contains no guarantee, standpoint expression or other implies in any form. Product specification and information in this manual is for reference only and subject to change without notice.

All rights reserved. No reproducing is allowed without acknowledgement.